

A1.
Wiring
Ducts

A2.
Cable
Ties

A3.
Din
Rails

A4.
Cable
Markers

A5.
Cable
Clamps

A6.
Wrapping
Bands

A7.
Nylon
Cable
Gland

A8.
Metal
Cable
Gland

A9.
Plastic
Flexible
Conduit

A10.
Metal
Flexible
Conduit

A11.
Terminal

A12.
Copper
Tube
Terminals

A13.
Heat
Shrinkable
Tubings

A14.
Bus Bar
Insulators

A15.
Tool

A16.
Cable
Clip


A17.
Insulating
Nut

A18.
Nylon
Cable
Carrier

CE RoHS EASCO® PG Type Waterproof Nylon Cable Gland (PG型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
Working Temperature: -40°C ~ +105°C. short time +160°C
Waterproof: IP68.
Color: White, Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66+EPDM橡胶.
工作温度: -40°C至105°C, 短时可达+160°C
防水等级: IP68.
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.

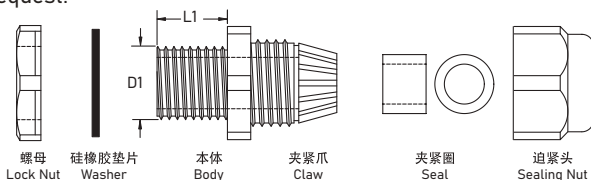

Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.002.0001	PG7	3	6.5	12.5	8	19/15	12.5~12.8
A0107.002.0002	PG7	3	5.5	12.5	9	19/19	12.5~12.8
A0107.002.0003	PG7	4	8	12.5	9	19/19	12.5~12.8
A0107.002.0004	PG9	4	8	15.2	9	22/19	15.2~15.5
A0107.002.0005	PG9	3	5.5	15.2	9	22/19	15.2~15.5
A0107.002.0006	PG11	6	10	18.6	9	24/22	18.6~18.9
A0107.002.0007	PG11	4	7	18.6	9	24/22	18.6~18.9
A0107.002.0008	PG13.5	7	12	20.4	9	27/24	20.4~20.7
A0107.002.0009	PG13.5	5	9	20.4	9	27/24	20.4~20.7
A0107.002.0010	PG16	8.5	14	22.5	10	30/27	22.5~22.8
A0107.002.0011	PG16	7	11	22.5	10	30/27	22.5~22.8
A0107.002.0012	PG21	12	18	28.3	10	35/33	28.3~28.7
A0107.002.0013	PG21	11	16	28.3	10	35/33	28.3~28.7
A0107.002.0014	PG29	18	25	37	12	46/42	37~37.4
A0107.002.0015	PG29	16	22	37	12	46/42	37~37.4
A0107.002.0016	PG36	24	31	47	15	56/52	47~47.4
A0107.002.0017	PG36	21	26	47	15	56/52	47~47.4
A0107.002.0018	PG42	31	40	54	20	65/62	54~54.4
A0107.002.0019	PG42	26	32	54	20	65/62	54~54.4
A0107.002.0020	PG48	32	44	59.3	20	69/65	59.3~59.7
A0107.002.0021	PG48	30	38	59.3	20	69/65	59.3~59.7